

Reliable, Resistant and Ready for You




Wayne Global Vista™
fuel dispenser



Visit Website

DFS *Worldwide* Brands

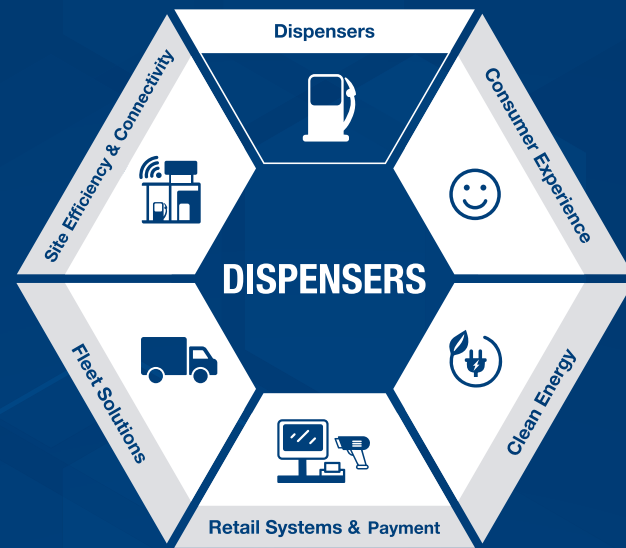

Optimal Performance from Leading Technology

The Wayne Global Vista™ fuel dispenser is built out over Dover Fueling Solutions' (DFS) leading technology, delivering high performance in a user-friendly equipment. The dispenser is certified against the ATEX, IEC, INMETRO and ABNT standards, with corrosion-resistant materials and global components guaranteeing high productivity, lower maintenance expenses and reduced operational stoppages.



High Performance

The Global Vista fuel dispenser was designed to address high performance and reliability. With 10 basic configurations and multiple built options, it offers the flexibility of providing up to four products across eight nozzles, with the choice of 50 LPM and 75 LPM flow rates, all in an easy to install and maintain dispenser.

Technical Specifications

Available Grades: 4 products
Available Nozzles: 4 per side (8 total)
Available Flow Rates: 50 LPM, 75 LPM (optional)
Hose Management: Hanging Hoses (standard)
Nozzle Reach: 4m, 4.3m (optional), 4.9m (optional)
Dispenser Orientation: Lane
Display Options: 7-6-5 (Price-Volume-Unit Price)
Vapour Recovery: No
Automatic Temperature Compensation: No
Pump Type: Suction and Remote
ARL32 Configurations: No
LPG Configurations: No
Customized Livery: Yes
Corrosion Resistance: Min. C3, stainless steel doors available for harsh environments
Operating Temperature: -40°C to +55°C
Relative Humidity: Condensing
Dimensions: 1220mm (L) x 508mm (W) x 2388mm (H) 891mm (L) x 508mm (W) x 2388mm (H)

DFS Worldwide Brands

Wayne Global Vista™ fuel dispenser

